

# ENUBB

## ENUBB 2x0,6 RÖD-GUL

Nexans Ref.: 17106201

Country Ref.: 7330000003163

EAN 13: 7330000003163

PA-insulated jumper wire


### DESCRIPTION

#### Design

PA-insulated, flame retardant jumper wire. Is used as jumper wire in cross-connect frames in central offices. The wire is also installed in tubes in buildings.

#### Quality and environmental management system

Certified according to ISO 9001, IRIS, ISO/TS 16949 and ISO 14001.

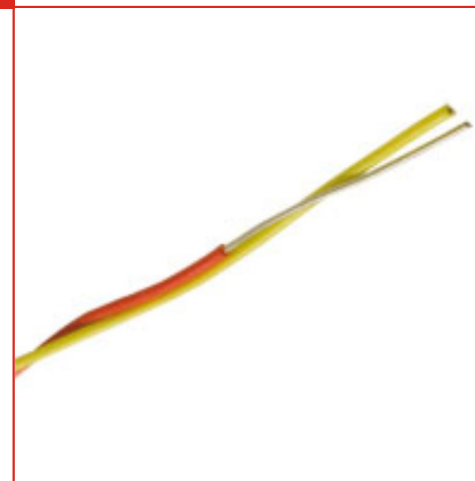

#### STANDARDS

International IEC 60332-1

National SS 424 16 91



Halogen free  
Yes



Ambient installation T°C range  
-10 - 50 °C



Operating temp.  
-15 - 70 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 5/20/22 [www.nexans.dk](http://www.nexans.dk) Page 1 / 2

### CHARACTERISTICS

#### Construction characteristics

Conductor shape	Single wired
Conductor material	Tinned annealed copper
Insulation	Flame retardant polyamide
Halogen free	Yes

#### Dimensional characteristics

Conductor diameter	0.6 mm
Number of cores	2
Nominal outer diameter	2.0 mm

#### Electrical characteristics

Max. DC resistance of the conductor at 20°C	65.9 Ohm/km
Ohmical resistance of the insulation	10 MOhm.km
Maximum operating voltage	100 V

#### Usage characteristics

Length	500 m
Ambient installation temperature, range	-10 - 50 °C
Operating temperature, range	-15 - 70 °C
Packaging	Reel